

Engineering Specification

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____


Contractor's P.O. No. _____

Approval _____

Representative _____

Project Submittal Diagram

Automatic Water Shutoff Valve

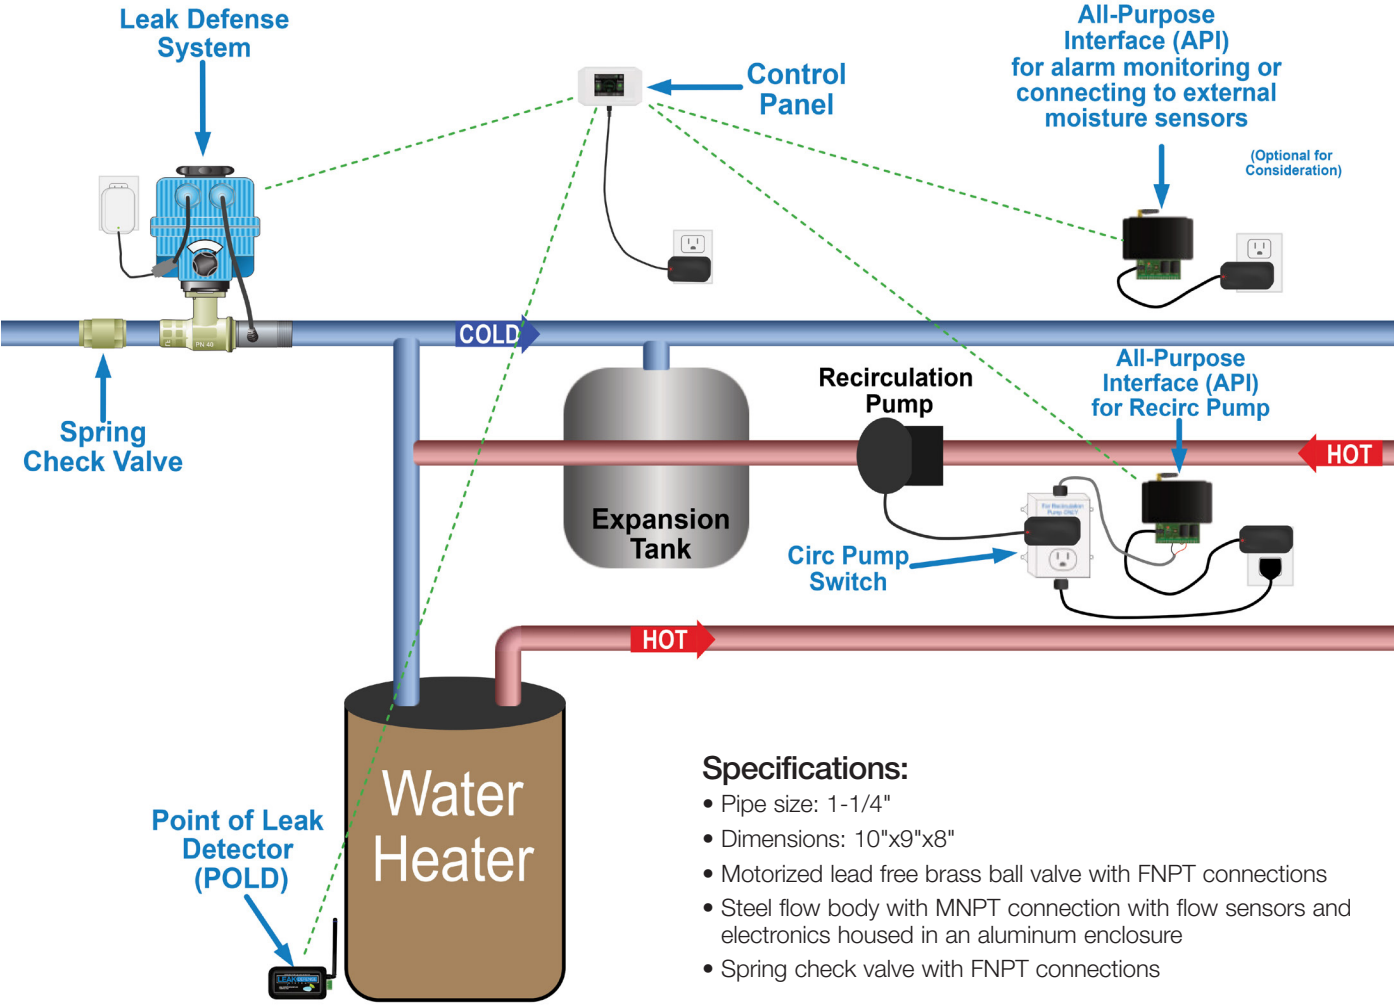

Specifications:

- Pipe size: 1-1/4"
- Dimensions: 10"x9"x8"
- Motorized lead free brass ball valve with FNPT connections
- Steel flow body with MNPT connection with flow sensors and electronics housed in an aluminum enclosure
- Spring check valve with FNPT connections

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

Items from Sentinel:

- 1 - LDS-3-125. 1-1/4" system (Valve + Control Panel)
- 1 - Spring Check Valve 1-1/4"
- 1 - Circ Pump Switch*
- 1 - Point of Leak Detector*
- 1 - All-Purpose Interface (For Circ Pump Switch)*
- 1 - All-Purpose Interface (For Security and/or external sensors)*
- 1 - 12VDC / 12VDC Transformer w/ 6' of wire for Control Panel
- 1 - 120VAC / 12VDC Transformer w/ 6' of wire for each API
- 1 - 120VAC / 24VAC Transformer w/ 10' of wire for Valve Actuator**

*Optional items

**Can provide up to 100', if needed

Leak Defense System will require standard 120V power receptacle for each of the following:

- 1) Leak Defense System Valve
- 2) Wireless Control Panel
- 3) Circ Pump Switch
- 4) All-Purpose Interface (for Circ Pump Switch)
- 5) All-Purpose Interface (for Security)

NOTICE

Valve and accessories have a wireless communication RF range of roughly 50 ft-100 ft to the Control Panel depending on wall and floor construction type.



USA: T: (760) 884-8300 • Sales@senthhydro.com • LeakDefenseSystem.com